


5. Sew the two table runner halves together. Press the seam open.
6. Sew the border strips to the long sides of the runner. Press. Trim the excess corners matching the angle of the end units in the runner.



7. **FINISHING:** Layer the pieced top and backing right sides together. Baste to secure the layers. Trim the backing to match the pieced tops outer edges. Flip the runner over and place on batting strip. This should have the wrong side of the pieced top against the batting. Sew around the outer edges of the runner leaving several inches open for turning. Trim the batting flush with the runner layers outer edges. Trim the points. Turn the pieces right side out. Press well. Whip stitch the opening closed.
8. Quilting suggestions shown below. The echo quilting is 1/2" away from the stitch-in-the-ditch quilting line.

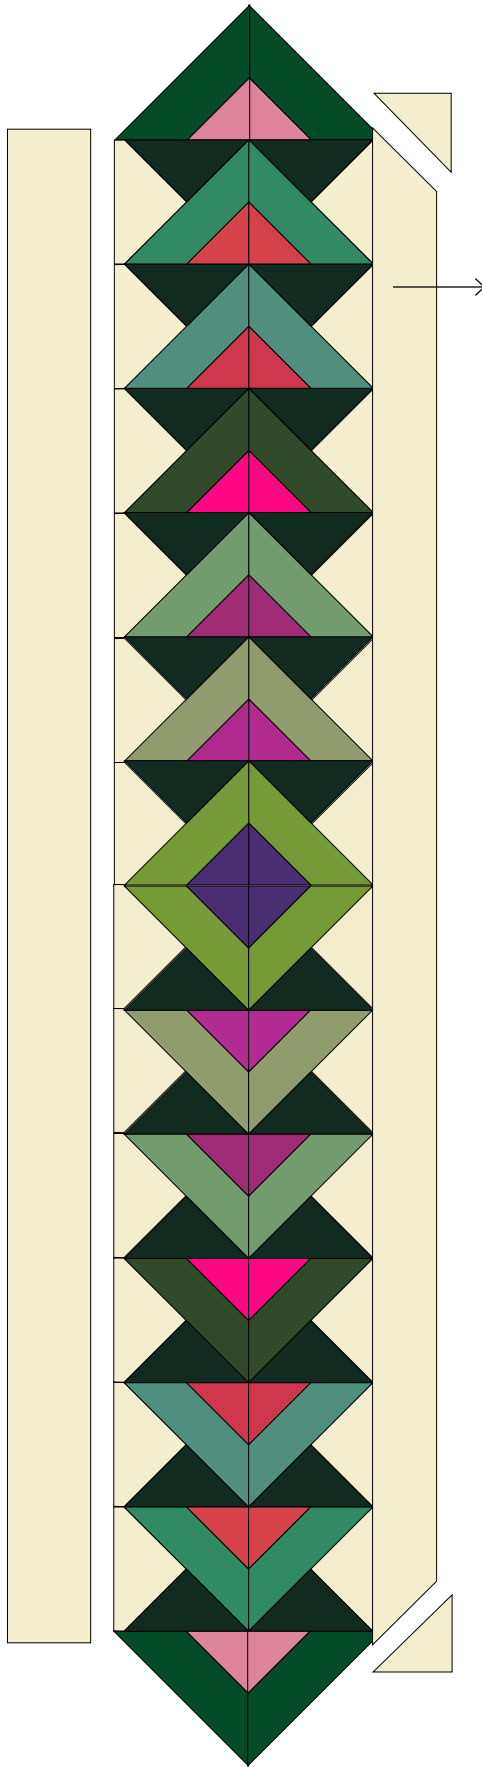