


## Fusible Web Appliqué Directions

1. Layout the fusible webbing, paper side up. Place the template face down on the paper. Using a soft pencil, trace around the template. Leave 1/4" yard to 1/2" between each appliqué.
2. Cut out the appliqué leaving a small border of paper around each piece.
3. Follow the manufacturer's directions, iron the fusible side of the web to the wrong side of the appliqué fabric.
4. Cut out the appliqué on the pencil lines. Remove the paper, and using the manufacturer's directions press the appliqué in place, fusible side down.

5. Machine or hand sew a buttonhole stitch around the appliqué. Use your choice of matching, contrasting or invisible thread.



**Hint:** If doing multiples of the same appliqué, draw several of the templates on to the fusible webbing and cut out as a group and iron to the back of the fabric.

## Layout Diagram Directions

1. Tape the layout diagram sections together matching the notches. Turn the diagram over and trace image to the reverse side of the paper. Use a light-box or tape the diagram to a window so the drawing will be visible.


## Appliqué Layout

1. Draw a light pencil line 1" up from the bottom edge of the 42" square of background fabric. If using 40 1/2" square, draw 1/4" up from the bottom edge of the fabric. Draw the line around the entire perimeter of the fabric.
2. Place the layout diagram under the fabric, lining up the bottom line of the diagram 1" above the pencil line on the background fabric. Trace the appliqué design onto the fabric. Trace one section on the fabric, flip the diagram over and continue tracing the layout diagram on the fabric. (Do not trace the flower centers on the fabric, as they will be centered on the flowers when appliquéing)

## Constructing Bias Strips

1. Trim the selvage from the remaining section of Fabric 8. The piece will be approximately 18" x 28". Trim the top and bottom of the fabric to straighten the edges.

2. Iron a piece of fusible webbing to the back of the fabric.
3. Lay the 45° angle line of your ruler against the edge of the fabric as illustrated. Cut off the corner at a 45° angle.
4. Cut 1/4" wide bias strips from the remainder of the fabric.

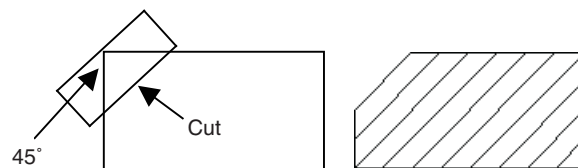

## Appliqué

1. Layout the vine and basket handles on the background fabric, cutting the bias strips to fit. Vine can be placed in sections. Ends of vines should be placed under the flowers. The flowers will cover the vine ends. When laying out basket handles make sure that the basket will cover the handle ends. Fuse in place. Machine appliqué the vine to the background.
2. Using fusible appliqué, layout and appliqué the baskets, flowers, and leavers to the background.

**Border Directions** (If your measurements are different cut to your measurements) Press seams away from the body of the quilt.

## How to measure quilt for borders

1. Measure the width of the quilt at the center of the quilt. Cut the top and bottom border to that measurement, and sew to the top and bottom of the quilt.
2. Measure the length of the quilt at the center to include the top and bottom borders. Cut the side borders to that measurement. Sew to the sides of the quilt.
3. Repeat measurement process for each border.

