


### Edge Row on Left

This row is made of squares folded in half diagonally and basted onto the base square.

Follow the Fabric Layout for Rows table as you assemble the units used for this row. The non-base squares will be the ones folded in half.

Fold the square in half diagonally. Press. Bring the iron straight down to avoid stretching the bias edge. Lay the folded pressed triangle on top of the base square. Line up the raw edges and machine baste  $\frac{1}{8}$ " from the edge on the two sides.

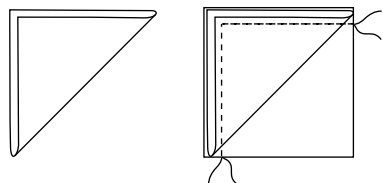

Repeat the process for each unit until all 18 units are sewn.


With the folded triangles positioned on the upper left, sew the units together. Press the seams toward the top.

### Edge Row on Right

This row uses the same fabric sequence as the Edge Row on Left, but it is assembled as a mirror image with the triangle positioned on the upper right. Once the units are assembled, sew them together with the folded triangles positioned in the upper right. Press seams toward the top.

### Assembling the top:

Layout the rows in order.

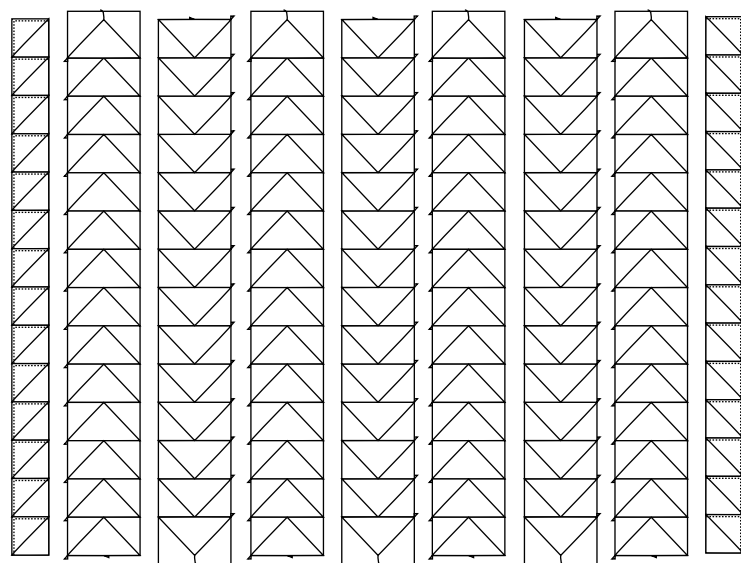

Sew the rows together. The seams allowances should lay in opposing directions. Be careful to keep the seam allowances that are underneath by using the feed dogs going in the correct direction. Press the top.

### Adding Borders

Measure the top across the center lengthwise. Cut two strips from the inner border fabric, 2" by that measurement. Sew strips to the sides of the quilt top.

Measure the top across the center, widthwise. Cut two strips from the inner border fabric, 2" by that meas. Sew strips to top and bottom of the quilt top. Press seams toward border.

Measure the top across the center, lengthwise. Cut two strips from the outer border fabric,  $5\frac{1}{2}$ " by that meas. Sew strips to the sides of the quilt top.

Measure the top across the center, widthwise. Cut two strips from the outer border fabric,  $5\frac{1}{2}$ " by that meas. Sew strips to the top and bottom of the quilt top. Press seams toward border.


### Backing and Basting:

Piece the back 60"x 65". Layer the backing, batting and top. Baste.

### Grid Quilting:

Mark diagonal lines for quilting. Line up the ruler with the corners of the background squares. The marked lines should cross the folds of the triangles at the center. Pivot at the points of the triangles. This will form a zig zag pattern across the top. Quilt on the marked lines. From row to row, work down the quilt until all the triangles have been quilted. The lines at the top and bottom of the quilt will be broken up.

### Detail Quilting:

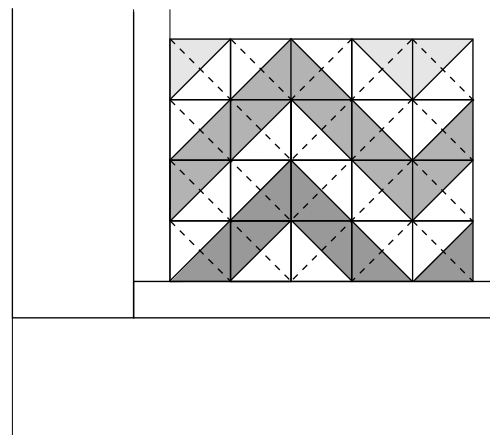

Begin and end each line of stitching by decreasing the stitch length to .5 and reversing for a couple of stitches. Roll back the bias folded edges of the triangles, forming a curve, and top stitch right on the folded edge. As you stitch the folds in place, they will form two scallops on each triangle side. The folding will alternate direction, from triangle to triangle. You will be quilting in a zigzag direction similar to the grid quilting. Move from one row of folds to the next until all the folds have been rolled and stitched.

