
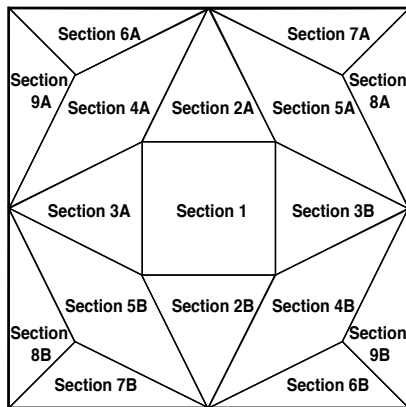


Mayflowers

Designed by Jinny Beyer • Instructions by Kelly Gallagher-Abbott
 Finished Quilt Size: 84 1/4" Square • Advanced-Intermediate Level

Please read all instructions carefully prior to beginning quilt.

- All piecing uses a very accurate scant quarter inch seam allowance. In this quilt, accuracy is absolutely critical, so sew several sample seams and use an accurate ruler to determine a machine setting that is slightly under 1/4".
- All strips are to be cut on crosswise grain of the fabric, with the exception of the border strips. Carefully trim off selvages. Strip measurements are based on a length of 42".
- All cutting measurements include 1/4" seam allowances.
- For accuracy using Templates 2-6, make an accurate paper template for each. These can be taped to the underside of a ruler, aligning the cutting edge with the edge of the template. Place over fabric strips to cut all pieces as shown.
- With the exception of the first piecing step in Section 1, all seams are to be pressed open. *Do not use steam, and be extremely careful to not stretch or distort the fabric in any way.*

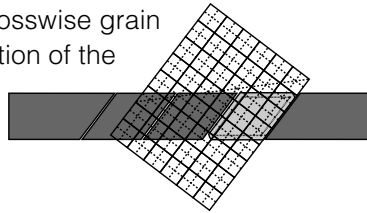

The sections are numbered as follows:

- Section 1 Uses 3x3" squares
- Section 2A Uses Templates 2 and 3
- Section 2B Uses Templates 2 and 3
- Section 3A Uses Templates 2 and 3
- Section 3B Uses Templates 2 and 3
- Section 4A Uses Template 4
- Section 4B Uses Template 4
- Section 5A Uses Template 4
- Section 5B Uses Template 4
- Section 6A Uses Templates 5 and 6
- Section 6B Uses Templates 5 and 6
- Section 7A Uses Templates 5R and 6R
- Section 7B Uses Templates 5R and 6R
- Section 8A Uses Templates 5 and 6
- Section 8B Uses Templates 5 and 6
- Section 9A Uses Templates 5R and 6R
- Section 9B Uses Templates 5R and 6R

Materials:

- All fabrics are listed under the individual section where they are used.
- Basic sewing supplies and 100% cotton thread in neutral color.
- A felt wall and a portable felt covered piece of foam core or bulletin board measuring approximately 24" x 36" will be very helpful for fabric placement of individual sections.
- Iron (no steam!) and pressing surface, preferably one the same size or larger than the foam core. You may want to block all diamond and triangle sections for accuracy, so you will need to pin and press on a large flat surface.
- Fine metal or glass head pins for piecing and blocking. Plastic head pins will melt.
- 1 1/2 yards of muslin to create blocking guides.
- Masking tape.
- Rotary cutter and accurate acrylic rulers with a maximum of 1/8" increments. The following rulers are recommended: 6" x 24", 6" square, 12"-15" square.
- Double sided clear tape.
- Fine tipped chalk pencil, mechanical pencil, and permanent fine tipped marker.

Section 1, Center Section – Make One

Fabric ID	Fabric Location	# of Strips	Cutting Directions
149 (9812-1)	1	1	Cut 1 – 3x3" square.
224 (1702-7)	2	1	Cut 2 – 3x3" squares.
222 (9812-16)	3	1	Cut 3 – 3x3" squares.
221 (9511-19)	4	1	Cut 4 – 3x3" squares.
220 (2767-8)	5	1	Cut 5 – 3x3" squares.
219 (9414-15)	6	1	Cut 6 – 3x3" squares.
218 (2266-15)	7	1	Cut 7 – 3x3" squares.
216 (4005-5)	8	1	Cut 8 – 3x3" squares.
215 (9812-5)	9	1	Cut 7 – 3x3" squares.
140 (3302-3)	10	1	Cut 6 – 3x3" squares.
138 (2770-3)	11	1	Cut 5 – 3x3" squares.
137 (2266-8)	12	1	Cut 4 – 3x3" squares.
136 (2768-1)	13	1	Cut 3 – 3x3" squares.
134 (2772-2)	14	1	Cut 2 – 3x3" squares.
176 (9410-14)	15	1	Cut 1 – 3x3" square.

Referring to the color photo of the quilt and fabric location guide above, lay the fabrics out on the felt covered foam core.

Pick up the fabric in Column 2/Row 1 (C2/R1) and place right sides together (RST) on the fabric in C1/R1. Stitch the seam, and leave this section under the foot of the machine.